


A PROVEN, HIGH-PERFORMANCE SYSTEM

A sandwich indoor-sports flooring system, Laykold GymSports is composed of prefabricated recycled rubber mat adhered to the substrate and coated with a minimum 2mm premium PU wear coat. The system is finished with two layers of premium polyurethane matte top coat to give a seamless surface that's durable and sustainable.

SYSTEM STRUCTURE LAYERS

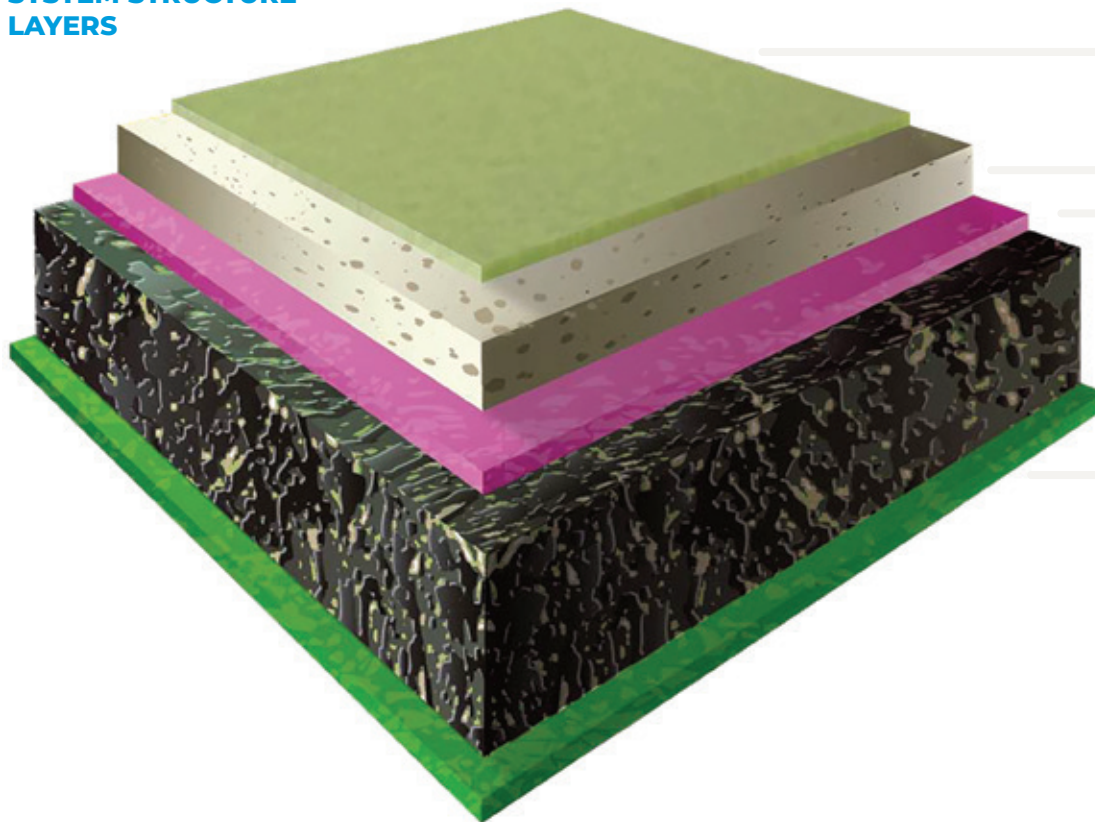

1. The water-based, non-glare matte topcoat is applied in two layers. It has excellent durability and delivers optimal balance between slide and friction. Available in 14 colours and design options.
2. The durable and flexible wear coat (51.13% renewable) is applied in 2mm–3mm thickness designed to withstand a high load. This unmatched durability is in the strength of the resin.
3. The porefiller (43.76% renewable) is an advanced polyurethane sealer that is applied in two layers to seal the top and edges of the mat.
4. The rubber shock pad is available in various sizes ranging from 4mm–12mm thick. The prefabricated rubber mat is made from 100% recycled rubber tyres and is manufactured to specific densities that provide the right balance of force reduction while supporting player development and being easy on the body.
5. The adhesive (42.36% renewable) provides maximum adhesion between the shock pad and the substrate. It is designed to use on concrete or asphalt bases.